


OVERVIEW

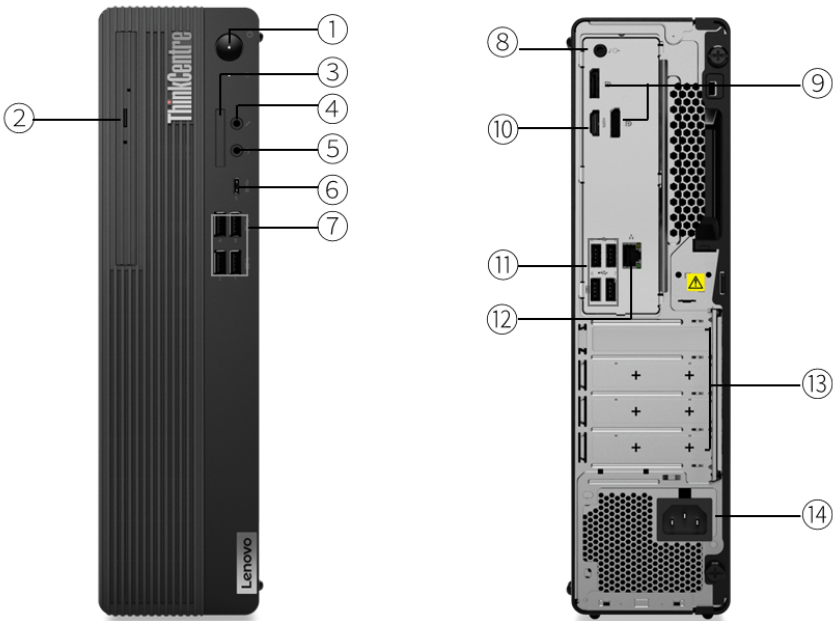

1. Power button	8. Line-out (3.5mm)
2. Optical drive *	9. 2x DisplayPort 1.4a (HBR2, DSC)
3. Card reader *	10. HDMI 2.1 TMDS
4. Microphone jack (3.5mm)	11. 4x USB-A (Hi-Speed USB)
5. Headphone / microphone combo jack (3.5mm)	12. Ethernet (RJ-45)
6. USB-C (USB 5Gbps), with 15W charging	13. Optional ports on expansion cards *
7. 4x USB-A (USB 5Gbps)	14. Power connector

- Notes:
- Items with \* are only available on selected models
  - More ports are available through the optional expansion cards (not shown on the sample product above)

PERFORMANCE

Processor

Processor Family

AMD Ryzen™ 3 / 5 / 7 8000 or Ryzen™ 3 / 5 / 7 PRO 8000 Series Processor

Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics	NPU
AMD Ryzen™ 3 8300G	4	8	3.4GHz	4.9GHz	4MB L2 / 8MB L3	AMD Radeon™ 740M	-
AMD Ryzen™ 3 PRO 8300G	4	8	3.4GHz	4.9GHz	4MB L2 / 8MB L3	AMD Radeon™ 740M	-
AMD Ryzen™ 5 8500G	6	12	3.5GHz	5.0GHz	6MB L2 / 16MB L3	AMD Radeon™ 740M	-
AMD Ryzen™ 5 8600G	6	12	4.3GHz	5.0GHz	6MB L2 / 16MB L3	AMD Radeon™ 760M	AMD Ryzen™ AI
AMD Ryzen™ 5 PRO 8500G	6	12	3.5GHz	5.0GHz	6MB L2 / 16MB L3	AMD Radeon™ 740M	-
AMD Ryzen™ 5 PRO 8600G	6	12	4.3GHz	5.0GHz	6MB L2 / 16MB L3	AMD Radeon™ 760M	AMD Ryzen™ AI
AMD Ryzen™ 7 8700G	8	16	4.2GHz	5.1GHz	8MB L2 / 16MB L3	AMD Radeon™ 780M	AMD Ryzen™ AI
AMD Ryzen™ 7 PRO 8700G	8	16	4.2GHz	5.1GHz	8MB L2 / 16MB L3	AMD Radeon™ 780M	AMD Ryzen™ AI

Operating System

Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Home
- Windows® 11 Home Single Language
- Windows® 11 IoT Enterprise LTSC 2024
- Windows® 11 DG Windows® 10 Pro 64
- Ubuntu Linux
- No preload operating system

Graphics

Graphics\*\*\*

Graphics	Type	Memory	Max Resolution	Connector	Key Features
AMD Radeon™ 740M	Integrated	Shared	4096x2160@60Hz(HDMI®), 4096x2160@60Hz(DP)	2x DP 1.4a (HBR2, DSC), 1x HDMI® 2.1 TMDS	DirectX® 12
AMD Radeon™ 760M	Integrated	Shared	4096x2160@60Hz(HDMI®), 4096x2160@60Hz(DP)	2x DP 1.4a (HBR2, DSC), 1x HDMI® 2.1 TMDS	DirectX® 12
AMD Radeon™ 780M	Integrated	Shared	4096x2160@60Hz(HDMI®), 4096x2160@60Hz(DP)	2x DP 1.4a (HBR2, DSC), 1x HDMI® 2.1 TMDS	DirectX® 12
AMD Radeon™ RX 6400	Discrete	4GB GDDR6	7680x4320@60Hz(HDMI®), 7680x4320@60Hz(DP)	1x HDMI® 2.1 FRL, 1x DP 1.4a	DirectX® 12, OpenGL 4.6

Monitor Support

Monitor Support

Supports up to 3 independent displays via onboard ports (2x DisplayPort™ and 1x HDMI®), more displays support via discrete graphics

Chipset

Chipset

AMD PRO665 Chipset

Memory

Max Memory<sup>[1]</sup>

Up to 64GB DDR5-5200

Memory Slots

Two DDR5 UDIMM slots, dual-channel capable

Memory Type<sup>[2]</sup>

DDR5-5200

Notes:

- [1] The max memory is based on the test results with current Lenovo® memory offerings.
- [2] Installed memory is actually DDR5-5600 but may run as DDR5-5200 due to the memory support capability of processor.

Storage

Max Storage Support<sup>[1]</sup>

Up to three drives, 1x 3.5" HDD + 2x M.2 SSD

- 3.5" HDD up to 2TB
- M.2 SSD up to 2TB each

Storage Type\*\*\*

Disk Type	Interface	RPM	Security
3.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2280 SSD	PCIe® NVMe®, PCIe® 4.0 x4	-	Opal 2.0

RAID

RAID 0/1 support for M.2 SSDs (RAID preset only available via special bid models)

Notes:

- [1] The max capacity of each disk type is based on the test results with current Lenovo® storage offerings.

Removable Storage

Optical

- DVD burner (DVD±RW), SATA connector, slim (9.0mm)
- None

Card Reader

- 3-in-1 card reader (SD, SDHC, SDXC)
- No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC623-CG codec

Speakers

- No speakers
- Single speaker, 1W x1

Power Supply

Power Supply\*\*

Power	Type	Efficiency	Key Features
180W	Fixed	85%	100-240V, 50-60Hz
260W	Fixed	90%	100-240V, 50-60Hz
310W	Fixed	92%	100-240V, 50-60Hz

DESIGN

## Input Device

### Keyboard\*\*

- Lenovo® Calliope Keyboard (USB connector), black
- Lenovo® Traditional Keyboard (USB connector), black
- No keyboard

### Mouse

- Lenovo® Calliope Mouse (USB connector), black
- No mouse

## Mechanical

### Form Factor

SFF (8.2L)

### Dimensions (WxDxH)<sup>[1]</sup>

92.5 x 297.7 x 339.5 mm (3.6 x 11.7 x 13.4 inches)

### Packaging Dimensions (WxDxH)

195 x 395 x 530 mm (7.68 x 15.55 x 20.87 inches)

### Weight<sup>[2]</sup>

Around 4.6 kg (10.1 lbs)

### Packaging Weight

Around 7.5 kg (16.5 lbs)

### Case Color

Black

### Bays

- 1x 3.5" disk bay
- 1x slim ODD bay

### Expansion Slots

- One PCIe® 3.0 x16, low-profile, length ≤ 155mm, height ≤ 70mm
- One PCIe® 3.0 x1, low-profile, length ≤ 155mm, height ≤ 70mm
- Three M.2 slots (one for WLAN, two for SSD)<sup>[3]</sup>

### EOU

Toolless cover, memory, disk, optical, extension card assembly / removal<sup>[4]</sup>

### Stand

- Vertical stand
- No stand

### Others

- (Optional) Dust filter
- Supports Smart Power On

### Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

[3] M.2 slot for SSD is M.2 PCIe® 4.0 x4 slot, supports up to 64Gbps on NVMe® drives

[4] To comply with UL 4200A, the toolless features are not available for the following countries: Argentina, Belize, Bolivia, Canada, Caribbean Group, Chile, Colombia, Costa Rica, Dominican Republic, Ecuador, El Salvador, Guatemala, Honduras, Mexico, Nicaragua, Panama, Paraguay, Peru, TAA, Uruguay, USA, Venezuela.

## CONNECTIVITY

### Network

#### WLAN + Bluetooth®\*\*

- Realtek® Wi-Fi® 6 RTL8852BE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 card

- AMD Wi-Fi® 6E RZ616, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.3, M.2 Card
- No WLAN and Bluetooth®

**Onboard Ethernet**

Gigabit Ethernet, Realtek® RTL8111FP, 1x RJ-45, supports DASH and Wake-on-LAN

**Optional Ethernet**

- 2.5 Gigabit Ethernet, Realtek® RTL8125BGS, 1x RJ-45, PCIe® x1
- No optional Ethernet

**Ports<sup>[1]</sup>****Front Ports**

- 1x USB-C® (USB 5Gbps / USB 3.2 Gen 1), with 15W charging
- 4x USB-A (USB 5Gbps / USB 3.2 Gen 1)
- 1x headphone / microphone combo jack (3.5mm)
- 1x microphone (3.5mm)

**Optional Front Ports**

1x card reader

**Rear Ports<sup>[2]</sup>**

- 4x USB-A (Hi-Speed USB / USB 2.0)
- 1x HDMI® 2.1 TMDS
- 2x DisplayPort™ 1.4a (HBR2, DSC)
- 1x Ethernet (RJ-45)
- 1x line-out (3.5mm)

**Optional Rear Ports\*\*\***

- 1x USB-C® (USB 20Gbps / USB 3.2 Gen 2x2), support data transfer, via PCIe® x4 card
- 2x USB-C® (USB 10Gbps / USB 3.2 Gen 2), support data transfer, via PCIe® x4 card
- 2x USB-A (Hi-Speed USB / USB 2.0), via 2-port adapter
- 2x USB-A (USB 5Gbps / USB 3.2 Gen 1), via 2-port USB expansion card, PCIe® x1
- 1x parallel
- 1x serial
- 1x 2.5GbE RJ-45, via additional PCIe® adapter

---

**Notes:**

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

[2] For video ports on discrete graphics, please see [graphics section](#)

## SECURITY & PRIVACY

### Security

**Security Chip**

Discrete TPM 2.0, TCG certified, FIPS 140-2 certified

**Physical Locks**

- (Optional) E-lock
- (Optional) Smart Cable Clip
- Kensington® Security Slot™, 3 x 7 mm
- Padlock Loop

**Chassis Intrusion Switch**

- Chassis intrusion switch
- No chassis intrusion switch

**Fingerprint Reader**

No fingerprint reader

#### Other Security

Pluton security processor

#### BIOS Security

- Administrator password
- Hard disk password
- Power-on password
- Absolute persistence module
- Boot sequence control
- Boot without keyboard and mouse
- Cover tamper detected<sup>[1]</sup>
- Certificate-based BIOS authentication
- Configuration change detection
- Individual USB port disablement
- Secure wipe
- Secure boot
- Self-healing BIOS<sup>[2]</sup>
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- More BIOS security features, please visit [BIOS Simulator](#)<sup>[3]</sup>

Notes:

[1] Only available for the models with Chassis Intrusion Switch

[2] Self-healing BIOS is only available via Special Bids

[3] The BIOS simulator is just for reference. Default settings and some options may vary depending on the hardware, operating system and BIOS version.

## MANAGEABILITY

### System Management

#### System Management

- DASH 1.1 / 1.2
- Non-DASH

## SERVICE

### Warranty<sup>[1]</sup>

#### Base Warranty\*\*

- 1-year courier or carry-in service
- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

Notes:

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://support.lenovo.com/warrantylookup/warrantypolicy>.

## ACCESSORIES

### Bundled Accessories

#### Bundled Accessories\*\*\*

- DP to DVI dongle
- DP to HDMI® dongle
- DP to VGA dongle
- HDMI® to VGA dongle
- Smart Cable (USB-A to USB-C®)
- None

## OPERATING REQUIREMENTS

### Operating Environment

#### Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

#### Relative Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

#### Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

## ENVIRONMENTAL

### Sustainability

#### Material

85% PCC ABS bezel  
95% PCC ABS wired USB keyboard/mouse top/bottom cover  
95% PCC thermal shell with OBP  
90% PIC recycled plastic EPE cushion  
30% OBP used in bag  
FSC certified paper in packaging

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT™ Silver Registered<sup>[2]</sup>
- (Optional) EPEAT™ Gold Registered<sup>[3]</sup>
- ErP Lot 3
- GREENGUARD®
- RoHS compliant
- TCO Certified 9.0

#### Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2], [3] EPEAT™ is registered where applicable, please visit [epeat.net](https://epeat.net) for registration status by country.

### Other Certifications

#### Other Certifications

(Optional) TÜV Rheinland® Ultra Low Noise

#### Mil-Spec Test

MIL-STD-810H military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Solar Radiation, Contamination by Fluids, Salt Fog)

- Feature with \*\* means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Feature with \*\*\* means that one or more options listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow

disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.

- The specifications on this page may not be available in all regions, and may be changed or updated without notice.





AMD



AMD



AMD



AMD



AMD



AMD